



SILVERSTONE

PF240



产品规格

型号	SST-PF240-ARGB SST-PF240-ARGB-V2	
水冷头	尺寸	全铜底座与塑料外盖
	材质	61mm (长) x 61mm (宽) x 50mm (深) 2.41" (长) x 2.41" (宽) x 1.98" (深)
水泵	转速	3400±10% RPM
	额定电压	12V
	额定电流	0.39A
风扇	尺寸	120mm (长) x 120mm (宽) x 25mm (深) 4.72" (长) x 4.72" (宽) x 0.98" (深)
	转速	600~2200 RPM
	噪音	7.4~35.6 dBA
	额定电压	12V
	额定电流	0.32A
	风流量	94CFM
	风压	3.53mm/H2O
	接头	4 Pin PWM
水冷排	尺寸	272mm (长) x 120mm (宽) x 28mm (高) 10.7" (长) x 4.72" (宽) x 1.1" (高)
	材质	铝
水管	长度	400 mm
	材质	橡胶
应用	Intel Socket LGA115x/1200/1700/2011/2066 (V2) Intel Socket LGA775/115X/1366/2011/2066 AMD Socket AM2/AM3/AM4/FM1/FM2	



Addressable RGB controller



Addressable RGB light water block




ARGB fan

产品特点



三相六极马达，相较于一般单相四极马达，能更平稳安静的运转，并大幅提升能源效率。

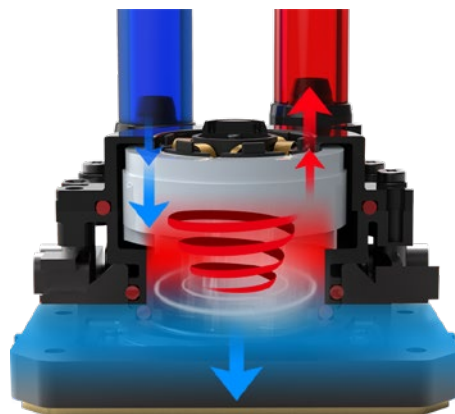

水冷头搭载多腔体技术(M.C.T)帮浦，藉由分布式水道与密封隔绝冷热腔体的设计，能完整并迅速带走处理器的热量，提供优越的散热能力。



搭配极致风压风流PWM风扇，九片锯齿状叶缘扇叶，提供稳定的风压与高效的风流，并有效抑制扇叶运转的噪音，兼具效能与寂静。



复合材质橡胶管线，内层为RMA-A等级耐腐蚀耐高温橡胶，外层为德国进口耐候老化橡胶，中间增加强化纤维编织层，确保橡胶管线可耐受10万次弯折。