



SILVERSTONE[®]
Designing Inspiration

SFX FORM FACTOR 300W

ST30SF


The reference SFX power supply




Supports standard SFX form factor and ATX via included bracket
300W continuous power output at 40°C operating temperature
rated for 24/7 operation
80 PLUS level efficiency (82% ~ 85% efficiency at 20% ~ 100% loading)

Class-leading single +12V rail
Silent running 92mm fan with 18dBA minimum
Single PCI-E 6pin connectors support
Active PFC

MODEL NO.	MAX DC OUTPUT	+3.3V	+5V	+12V	-12V	+5Vsb
SST-ST30SF	300W	16A	16A	25A	0.3A	3A
		90W	300W	3.6W	15W	

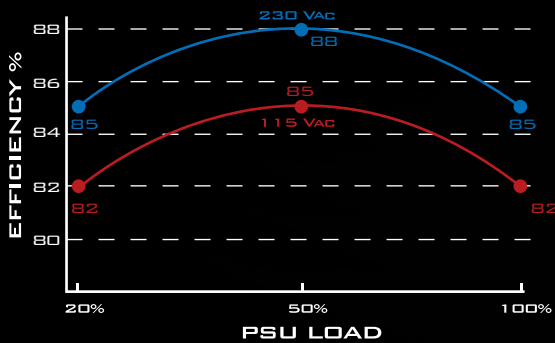

Designed for 80 PLUS Bronze level of efficiency to reduce wasted heat and save on electricity.

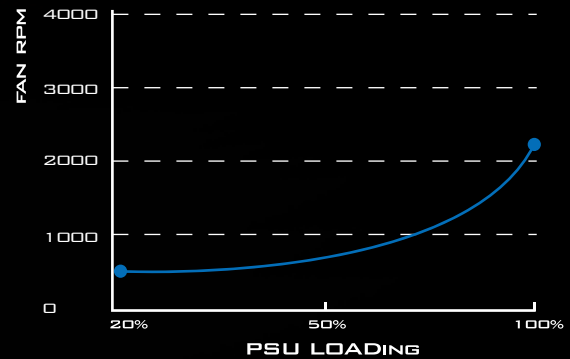

Built-in 92mm fan has excellent airflow and low noise, perfect for quiet home or office use.

Taiwan Headquarters

12F., No.168, Jiankang Rd.,
Zhonghe Dist., New Taipei City 235,
Taiwan R.O.C.

Tel: + 886-2-8228-1238 / Fax: + 886-2-8228-7123
For sales and purchasing: sales@silverstonetek.com

USA

13626 Monte Vista Ave. Unit #A,
Chino, CA 91710,
USA

Tel: + 1-909-465-9596 / Fax: + 1-909-465-9569
For General Questions/Sales: usasales@silverstonetek.com

Europe

Brandstücken 27,
D-22549 Hamburg,
Germany

Tel: + 49-40-675931-0 / Fax: + 49-40-675931-66
For sales and purchasing: sales.eu@silverstonetek.de