



SILVERSTONE

Serie SFX

SX750 Gold

Alimentatore SFX completamente modulare a 750W 80 PLUS Gold



750W

- Supporta fattore di forma SFX standard
- Ventola silenziosa HYB da 92mm
- Condensatori elettrolitici giapponesi
- Linea +12V leader nel settore
- Regolazione delle tensione $\pm 3\%$, basso ripple e rumore
- Modulare al 100%
- Tutti i cavi realizzati con matrici piane flessibili
- Connettori SATA angolati a 180° progettati per dischi rigidi impilati

Specifiche

Numero del prodotto	SST-SX750-G
Colore	Nero (vernice senza piombo)
Sistema di raffreddamento	Ventilador silenzioso HYB de 92mm
Livello sonoro	18 dBA min.
MTBF	100.000 ore
Temperatura di funzionamento	0°C ~ 40°C
Dimensioni	125 mm (L) x 63,5 mm (A) x 100 mm (P)






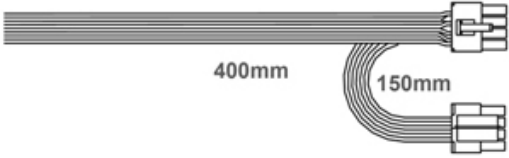

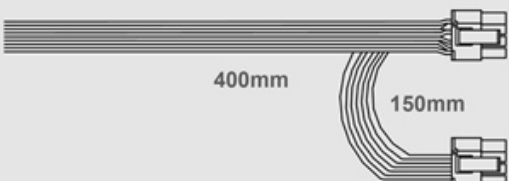

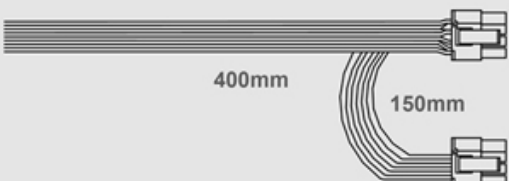








Condensatori giapponesi al 100%





Connectors / Cable

Photo	Type	Connector quantity per cable	Cable quantity	Length
	MB 20+4P connector	1	1	 300mm
	CPU 4+4P connector	1	1	 400mm
	CPU 8P connector	1	1	 400mm 150mm
	CPU 4+4P connector	1	1	 400mm 150mm
	PCIe 6+2P connector	2	2	 400mm 150mm
	4P Floppy connector	1	1	 300mm 200mm 100mm 100mm
	Peripheral 4P connector	3	1	 300mm 200mm 100mm 100mm
	SATA connector	4	2	 300mm 200mm 100mm 100mm